




ARS / ACS

ARSV / ACSV

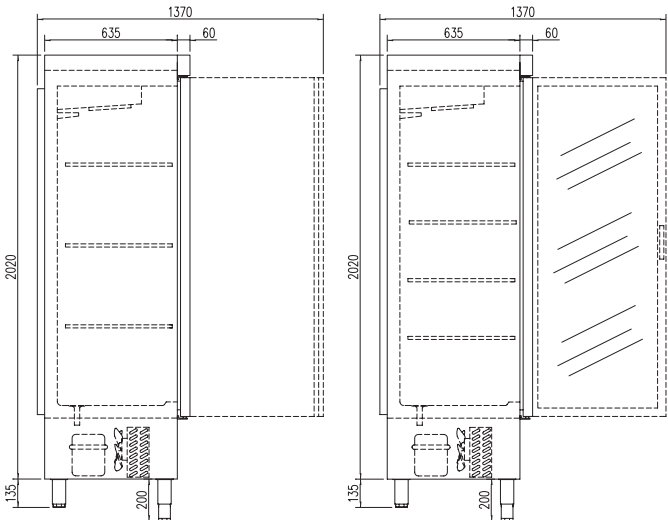

ARS-75-2

CARACTERÍSTICAS TÉCNICAS	TECHNICAL DATA	CARACTÉRISTIQUES TECHNIQUES
- ARS refrigeración - ACS congelación - ARSV refrigeración puerta cristal - ACSV congelación puerta cristal	- ARS cooling - ACS freezing - ARSV cooling double glazed doors - ACSV freezing double glazed doors	- ARG refroidissement - ACS congélation - ARGV refroidissement double vitrage - ACSV congélation double vitrage

Ver características técnicas en página 290 / See technical data in page 290 / Voir caractéristiques techniques page 290

* Gas opcional / * Optional gas / * Gaz optionnel

Modelo Model Modèle	Largo Length Longueur mm	Alto Height Hauteur mm	Fondo Depth Profondeur mm	Rango Range Gamme	Estantes Shelves Étagères	Capacidad Capacity Exposition L	Voltaje Voltage Tension	Refrig. Coolant Frigorigène	Potencia Frig. Frig Power Puissance Frig. W	Consumo Nominal Nominal Consumption Consommation Nominale W	Rango Range Gamme	clase climate 2015/1094 EN16825
ARS-75	680	2160	735	-2°C +8°C	3	505	230 V - 50 Hz	R-290	502	232	C	5 (40°C 40%)
ACS-75	680	2160	735	-20°C -15°C	3	505	230 V - 50 Hz	R-290	606	553	E	4 (30°C 55%)
ARSV-75	680	2160	735	-2°C +8°C	4	505	230 V - 50 Hz	R-290	502	260	-	5 (40°C 40%)
ACSV-75	680	2160	735	-20°C -15°C	4	505	230 V - 50 Hz	R-290	606	560	-	4 (30°C 55%)

PVP de opcionales incluidos en equipo, no como repuesto / PVP of options included in the equipment, not as a spare part / PVP d'options incluses dans l'équipement, pas en tant que pièce de rechange

OPCIONES - OPTIONS - OPTIONS			
Parrilla adicional 560 X 542	560 X 542 Extra shelf	Grille additionnelle 560 X 542	
Cerradura puerta inox	Solid door lock	Serrure à porte inox	
Barras carniceras	Bars for meat set	Tube de boucher	
Set adicional guías	Slides extra set	Kit supplémentaire de guides	
Cerradura puerta cristal	Glass door lock	Serrure à porte en verre	
Set 4 ruedas	4 Castors set	Jeu 4 roulettes	
Registrador de alarmas HACCP	HACCP alarm recorder	Enregistreur d'alarme HACCP	consultar - consult - consulter
Tropicalizado 43°C	Tropicalized to 43°C	Tropicalisé 43°C	consultar - consult - consulter
Respaldo inox	Stainless steel rear side	Soutien en inox	consultar - consult - consulter
230V 60hz / 115v 60hz	230V 60hz / 115v 60hz	230V 60hz / 115v 60hz	consultar - consult - consulter

Características técnicas y constructivas sujetas a variación sin previo aviso. / We reserve the right to change specifications whitout prior notice. / Sujet technique et la conception de modifications sans préavis.



ACS-75-2

ARSV-75-1

ARS-75-1	ARS-75-2	ARSV-75-1
ACS-75-1	ACS-75-2	ACSV-75-1