

ACR-55-1 2.251	ACR-55-2 2.307	ACR-125-2 3.077	ACR-125-3 3.128	ACR-125-4 3.170	ACM-125 5.144
ACC-55-1 3.023	ACC-55-2 3.046	ACC-125-2 4.137	ACC-125-3 4.195	ACC-125-4 4.239	

ACRV-55 2.541	ACRV-125 3.676	ACRP-125-14 3.859	ACRP-125-40 3.605	ACRPV-125-40 3.751
ACCV-55 3.175	ACCV-125 4.871		ACCP-125-40 4.670	ACCPV-125-40 5.150


mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	pares de guías sets of slides	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACR-55	-2°C +8°C	530	2040	770	3	3	409	230V-50Hz	R290	303	207	D	5 40°C 40%
ACR-125	-2°C +8°C	1250	2040	700	6	6	964	230V-50Hz	R290	543	416	D	5 40°C 40%
ACC-55	-20°C -15°C	540	2040	770	3	3	409	230V-50Hz	R290	495	474	E	4 30°C 55%
ACC-125	-20°C -15°C	1250	2040	700	6	6	964	230V-50Hz	R290	833	810	E	4 30°C 55%
ACM-125	2°C +8°C -20°C -15°C	1250	2040	700	6	6	830	230V-50Hz	R-290+R290	271+385	213+432	-	4 30°C 55%

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo y fondo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- ACRV / ACCV doble cristal
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.


- AISI-304 stainless steel exterior, except rear side and base
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- ACRV / ACCV double glazed door
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation shelf, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

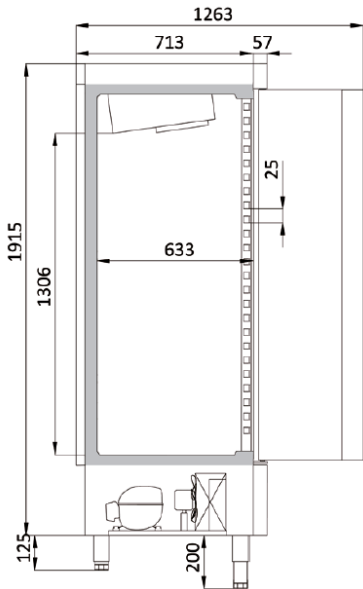


ACR-55

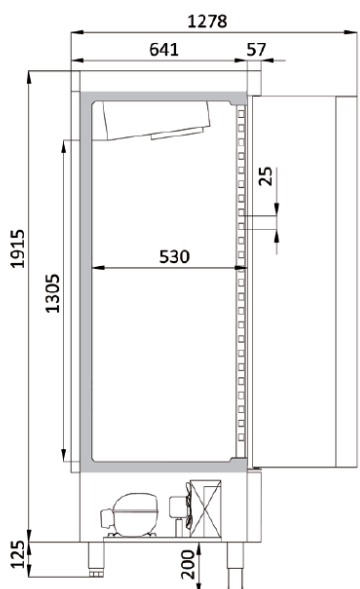

ACR-125

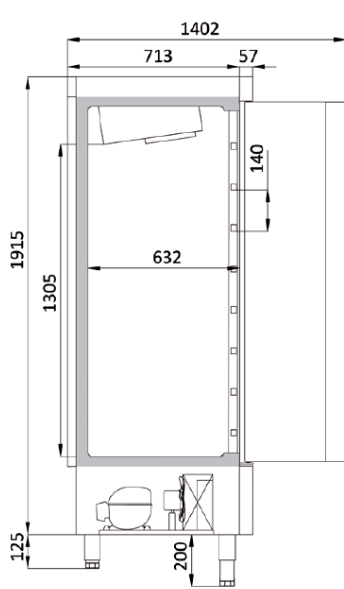

ACRP-125-14

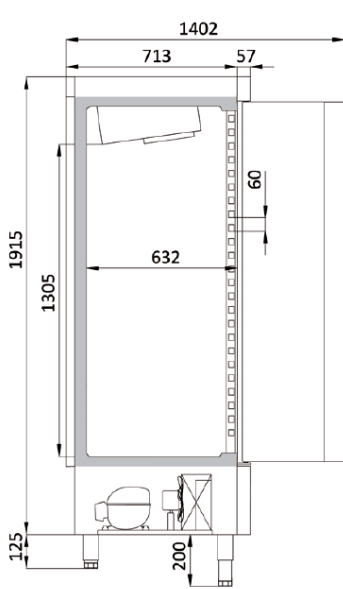

ACRP-125-40

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	pares de guías sets of slides	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	clase 2015/1094 EN16825
ACRV-55	-2°C +8°C	540	2075	770	4	4	409	230V-50Hz	R290	303	207	4 30°C 55%
ACRV-125	-2°C +8°C	1250	2040	770	8	8	964	230V-50Hz	R290	543	434	4 30°C 55%
ACCV-55	-20°C -15°C	540	2075	770	4	4	409	230V-50Hz	R290	495	485	4 30°C 55%
ACRP-125-14	-5°C -1°C	1250	2040	770	-	14	979	230V-50Hz	R290	833	810	4 30°C 55%
ACRP-125-40	0°C +8°C	1250	2040	770	6	34	979	230V-50Hz	R290	543	434	4 30°C 55%
ACCP-125-40	-20°C -15°C	1250	2040	770	6	34	979	230V-50Hz	R290	833	810	4 30°C 55%
ACRPV-125-40	2°C +8°C	1250	2040	770	6	34	979	230V-50Hz	R290	543	434	4 30°C 55%
ACCPV-125-40	-20°C -15°C	1250	2040	770	6	34	979	230V-50Hz	R290	833	824	4 30°C 55%

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Modelo 14: cajas para pescado
- Modelos 40: capacidad bandejas / parrillas pasteleras 60x40
- Exterior en acero inox AISI-304, excepto el respaldo y fondo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- ACRV / ACCV doble cristal
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- Model 14: fish containers
- Models 40: capacity for 60x40 trays or shelves
- AISI-304 stainless steel exterior, except rear side and base
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- ACRV / ACCV double glazed door
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation shelf, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient