



MFB-120 2.886 €



MFB-160 3.504 €



MFB-120-CC 3.896 €



MFB-160-CC 5.019 €

| mod.       | rango<br>range °C | largo<br>length (mm) | alto<br>height (mm) | fondo<br>depth (mm) | estantes<br>shelves GN 1/1 | pares guías<br>slides sets | volumen<br>capacity (L) | voltaje<br>voltage | refrigerante<br>refrigerant | potencia frig.<br>frig. power W | potencia<br>power W | CCE<br>EEC<br>2015/1094<br>EN16825 | clase<br>climate<br>2015/1094<br>EN16825 |
|------------|-------------------|----------------------|---------------------|---------------------|----------------------------|----------------------------|-------------------------|--------------------|-----------------------------|---------------------------------|---------------------|------------------------------------|------------------------------------------|
| MFB-120    | -2°C<br>+8°C      | 1200                 | 600                 | 700                 | 2                          | 2                          | 169                     | 230V-50Hz          | R134a*                      | 304                             | 314                 | -                                  | 5 40°C 40%                               |
|            |                   |                      |                     |                     |                            |                            |                         |                    | R290                        | 414                             | 270                 | D                                  | 5 40°C 40%                               |
| MFB-120-CC | -2°C<br>+8°C      | 1200                 | 600                 | 700                 | 0                          | 0                          | 169                     | 230V-50Hz          | R134a*                      | 304                             | 314                 | -                                  | 5 40°C 40%                               |
|            |                   |                      |                     |                     |                            |                            |                         |                    | R290                        | 414                             | 270                 | D                                  | 5 40°C 40%                               |
| MFB-160    | -2°C<br>+8°C      | 1600                 | 600                 | 700                 | 3                          | 3                          | 264                     | 230V-50Hz          | R134a*                      | 560                             | 506                 | -                                  | 5 40°C 40%                               |
|            |                   |                      |                     |                     |                            |                            |                         |                    | R290                        | 502                             | 337                 | E                                  | 5 40°C 40%                               |
| MFB-160-CC | -2°C<br>+8°C      | 1600                 | 600                 | 700                 | 0                          | 0                          | 264                     | 230V-50Hz          | R134a*                      | 560                             | 506                 | -                                  | 5 40°C 40%                               |
|            |                   |                      |                     |                     |                            |                            |                         |                    | R290                        | 502                             | 337                 | E                                  | 5 40°C 40%                               |

\* no disponible mercado UE - not for EU market

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo y fondo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- **MFB-CC:** Cajoneras refrigeradas inox desmontables sobre guías inox telescópicas, sistema auto-cierre de serie
- Encimera de acero inox AISI-304 con frente curvo (opcional con peto sanitario 100 mm)
- Posibilidad de fabricar encimera especial a medida
- Pies en tubo de acero inox ajustables en altura 95 - 135 mm
- Unidad condensadora ventilada y extraíble
- Evaporador CENTRAL, sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero GWP y cero efecto ODP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Condiciones de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, except rear side and base
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- MFB-CC: Stainless steel drawers with telescopic stainless steel slides for complete opening, self-closing system as standard
- AISI-304 stainless steel worktop, with rounded front (optional with 100 mm sanitary upstand)
- Worktop can be customized on demand
- AISI -304 adjustable legs, 95 to 135 mm
- Removable and fan assisted condenser unit
- CENTRAL Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP effect
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating 32°C ambient



KBR-47 2.923 €

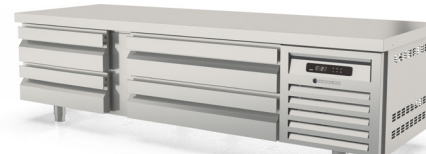

KBR-65 4.037 €



KBR-83 4.906 €

| mod.   | rango<br>range °C | largo<br>length (mm) | alto<br>height (mm) | fondo<br>depth (mm) | volumen<br>capacity (L) | voltaje<br>voltage | refrigerante<br>refrigerant | potencia frig.<br>frig. power W | potencia<br>power W | CCE<br>EEC<br>2015/1094<br>EN16825 | clase<br>climate<br>2015/1094<br>EN16825 |
|--------|-------------------|----------------------|---------------------|---------------------|-------------------------|--------------------|-----------------------------|---------------------------------|---------------------|------------------------------------|------------------------------------------|
| KBR-47 | -2°C<br>+8°C      | 1210                 | 600                 | 700                 | 169                     | 230V-50Hz          | R134a*                      | 304                             | 314                 | -                                  | 5 40°C 40%                               |
|        |                   |                      |                     |                     |                         |                    | R290                        | 502                             | 250                 | D                                  | 5 40°C 40%                               |
| KBR-65 | -2°C<br>+8°C      | 1660                 | 600                 | 700                 | 264                     | 230V-50Hz          | R134a*                      | 304                             | 314                 | -                                  | 5 40°C 40%                               |
|        |                   |                      |                     |                     |                         |                    | R290                        | 502                             | 259                 | D                                  | 5 40°C 40%                               |
| KBR-83 | -2°C<br>+8°C      | 2110                 | 600                 | 700                 | 359                     | 230V-50Hz          | R134a*                      | 304                             | 314                 | -                                  | 5 40°C 40%                               |
|        |                   |                      |                     |                     |                         |                    | R290                        | 502                             | 264                 | D                                  | 5 40°C 40%                               |


\* no disponible mercado UE - not for EU market

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo y fondo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Cajoneras refrigeradas inox desmontables sobre guías inox telescópicas, sistema auto-cierre de serie
- Encimera de acero inox AISI-304 con frente curvo (opcional con peto sanitario 100 mm)
- Posibilidad de fabricar encimera especial a medida
- Pies en tubo de acero inox ajustables en altura 95 - 135 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero GWP y cero efecto ODP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Condiciones de trabajo a 40°C 40% ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, except rear side and base
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Stainless steel drawers with telescopic stainless steel slides for complete opening, self-closing system as standard
- AISI-304 stainless steel worktop, with rounded front (optional with 100 mm sanitary upstand)
- Worktop can be customized on demand
- AISI -304 adjustable legs, 95 to 135 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP effect
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating 40°C 40% ambient

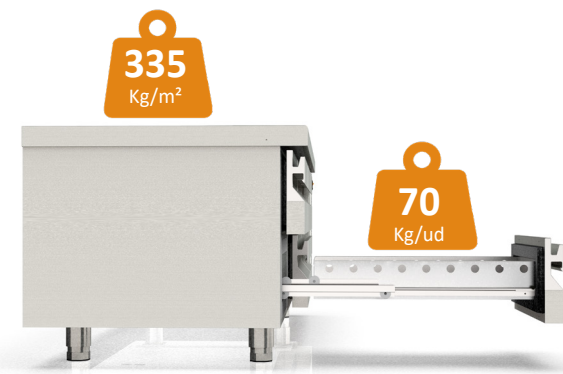

| OPCIONES                   | OPTIONS                      | €         |
|----------------------------|------------------------------|-----------|
| parrilla adicional GN-1/1  | additional shelf GN-1/1      | 31 €      |
| set adicional guías GN-1/1 | additional set GN-1/1 slides | 30 €      |
| cerradura puerta inox      | SS door lock                 | 25 €      |
| motor lado izquierdo       | left side motor              | 73 €      |
| encimera con peto          | worktop with splash-back     | 0 €       |
| set 4 ruedas               | set 4 wheels                 | 98 €      |
| set 6 ruedas               | set 6 wheels                 | 146 €     |
| respaldo inox              | SS rear side                 | consultar |
| 230V 60Hz / 115V 60Hz      | 230V 60Hz / 115V 60Hz        | consultar |
| APPC                       | HACCP                        | consultar |



| OPCIONES              | OPTIONS                  | €         |
|-----------------------|--------------------------|-----------|
| motor lado izquierdo  | left side motor          | 73 €      |
| encimera con peto     | worktop with splash-back | 0 €       |
| set 4 ruedas          | set 4 wheels             | 98 €      |
| set 6 ruedas          | set 6 wheels             | 146 €     |
| respaldo inox         | SS rear side             | consultar |
| 230V 60Hz / 115V 60Hz | 230V 60Hz / 115V 60Hz    | consultar |
| APPC                  | HACCP                    | consultar |

