



EBRW-751 2.750 €

EBRW-1302 4.125 €
EBRW-1302/2 4.985 €EBRW-2003 5.228 €
EBRW-2003/2 5.993 €

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	capacidad botellas bottles capacity (uds)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	clase 2015/1094 EN16825
EBRW-751	+2°C +18°C	680	2055	735	6	505	105	230V-50Hz	R290	502	260	4 30°C 55%
EBRW-1302	+2°C +18°C	1370	2055	735	12	1201	210	230V-50Hz	R290	845	396	4 30°C 55%
EBRW-1302/2	+2°C +18°C	1370	2055	735	12	505 + 505	105 + 105	230V-50Hz	R290	502 + 502	260 + 260	4 30°C 55%
EBRW-2003	+2°C +18°C	2055	2055	735	18	1852	315	230V-50Hz	R290	1814	1726	4 30°C 55%
EBRW-2003/2	+2°C +18°C	2055	2055	735	18	1201 + 505	210 + 105	230V-50Hz	R290	845 + 502	396 + 260	4 30°C 55%

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero plastificado negro (lacado opcional), excepto el respaldo
- **NI**: Interior en acero inox AISI-304
- **NN**: Interior en acero plastificado negro
- Puertas de apertura reversible (751), con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura), con marco aluminio anodizado y doble cristal con tratamiento bajoemisor (reduce la condensación de humedad)
- Cerradura de serie
- Doble luz interior LED 3000K
- Estantes en AISI-304 con frontal en madera, inclinables 20°
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero ODP y GWP
- Control digital de temperatura y humedad, con eficiente gestión del consumo de energía
- **EBRW-1302/2 y 2003/2**: dos departamentos independientes, con regulación de temperatura en rango +2°C +18°C

We reserve the right to change specifications without prior notice.

- Black coated steel (laquered on demand) exterior, except rear side.
- **NI**: AISI-304 Stainless steel interior
- **NN**: black plastic coated interior
- Reversible opening doors (751), with automatic closing system and magnetic weatherstripping (remains open when opening over 90°), with anodized aluminum frame and triple glass with low-emission treatment (reduces moisture condensation)
- Lock as standard
- Double LED interior light, 3000K
- AISI-304 shelves with front part on wood, can be mounted at a 20° angle
- Ventilated condensing unit
- Evaporator forced draft system, with anti-corrosion epoxy coating
- Forced draft fans stop when the door is opened
- Automatic evaporation of defrost water
- Injected polyurethane insulation, density 40 Kg / m³, zero ODP and GWP
- Digital temperature and humidity control, efficient management of energy consumption
- **EBRW-1302/2 and 2003/2**: two independent departments, with +2°C +18°C suitable temperature

OPCIONES	OPTIONS	€
estante adicional	additional shelf	130 €
estante especial	customized shelf	consultar
set 4 ruedas	4 castors set	98 €
set 5 ruedas	5 castors set	122 €
set 6 ruedas	6 castors set	146 €
set 4 patas	4 legs set	54 €
set 5 patas	5 legs set	68 €
set 6 patas	6 legs set	86 €
exterior inox o lacado	SS exterior or laquered	consultar
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	consultar


ESTANTES

Sabemos lo importante que es la correcta exposición del producto y nos adaptamos a sus necesidades para conseguir el mejor efecto final.

SHELVES

We know how important the correct display of the product is and we adapt to your needs to achieve the best final effect.

Estantes estándar (inclinables 20°) - Standard shelves (tiltable 20°)

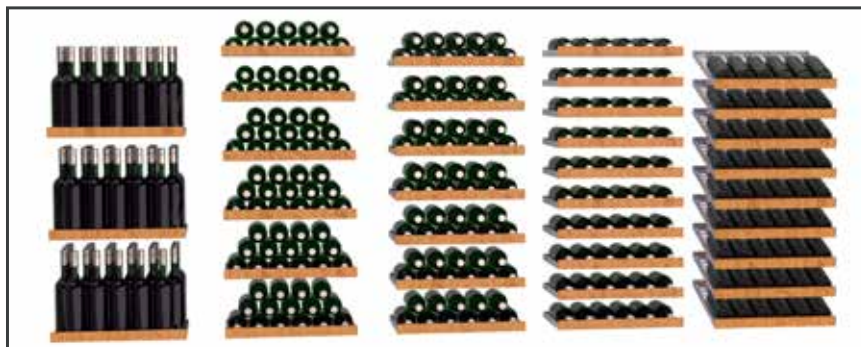

Estantes especiales (inclinación 35° y apoyo central) Customized shelves (35° inclination and central support)





BAR 3



EBRW-1302/2-NN bi-temperatura

Interior NEGRO y una puerta con estantes especiales
BLACK interior and one door with customized shelves



EBRW-751-NI

Interior INOX y estantes especiales
SS interior, with customized shelves

